



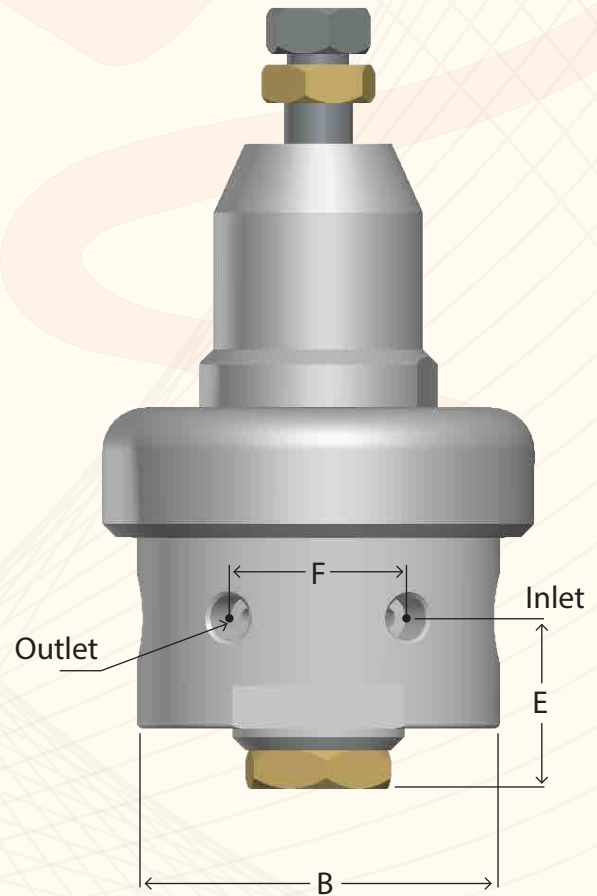


CNG REGULATOR

Outlet Connections Size	DIMENSIONS(mm)							
	A	B	C	D	E	F	G	H
CNG 15	149 mm	84 mm	74 mm	39.50 mm	39.50 mm	42 mm	100 mm	48,50 mm

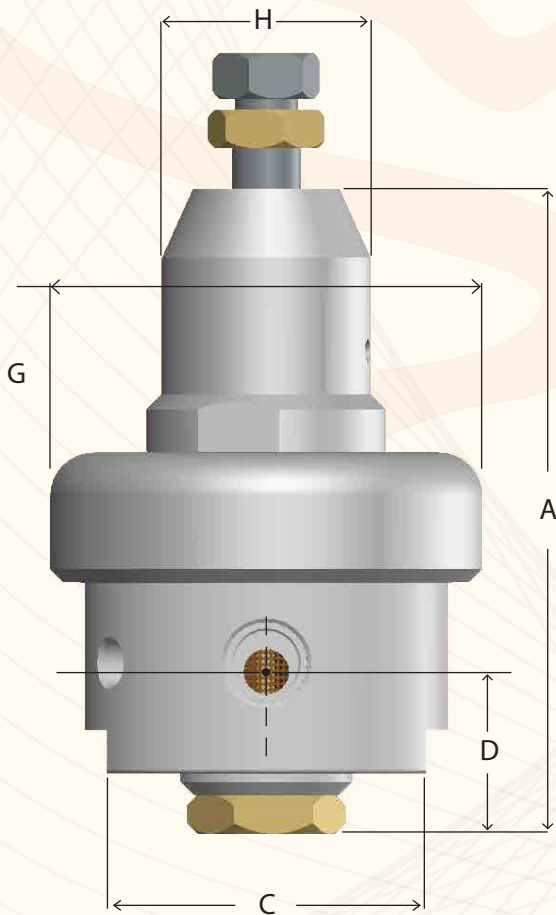

Product Code	Serial	Max Inlet Pressure	Max Outlet Pressure	Sensing Type	Temperature Range	Seat Diameter	Flow Coefficient	Connections		
								Inlet and Outlet		Gauge
								Size	Type	
MM.12.10.10	CNG 15	250 bar	20 bar	Diaphragm	-20° to +80°	6.5 mm	2.1	DN15	NPT	1/4 in NPT or ISO/BSP parallelthread®

Lorem ipsum

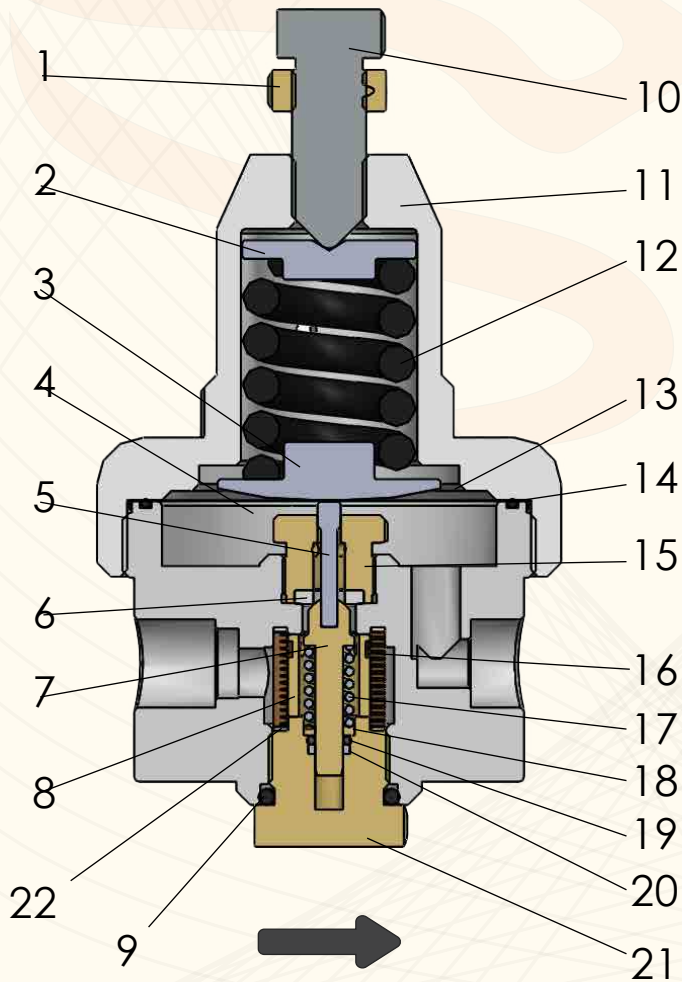

Component
1 NUT
2 UPPER SPRING GUIDE
3 LOWER SPRING GUIDE
4 BODY
5 SEAT SEAL PIN
6 SEAT
7 SEAT SEAL
8 FILTER HOUSING
9 23,47X3,53 O-RING
10 ADJUSTING SCREW
11 COVER
12 SET SPRING
13 DIAPHRAGM
14 72X2,0 O-RING
15 SEAT
16 FILTER
17 POPPET SPRING
18 POPPET SPRING HOUSING
19 6,07X1,78 O-RING
20 POPPET HOUSING TEFLON
21 POPPET HOUSING
22 FILTER TEFLON

CNG 15 SERIAL

Flow Coefficient

2.1


Max Inlet Pressure

70 bar



Outlet Pressure

0-20 bar


- 0 to 20.0 bar
- 0 to 14.0 bar
- 0 to 7.0 bar
- 0 to 3.0 bar

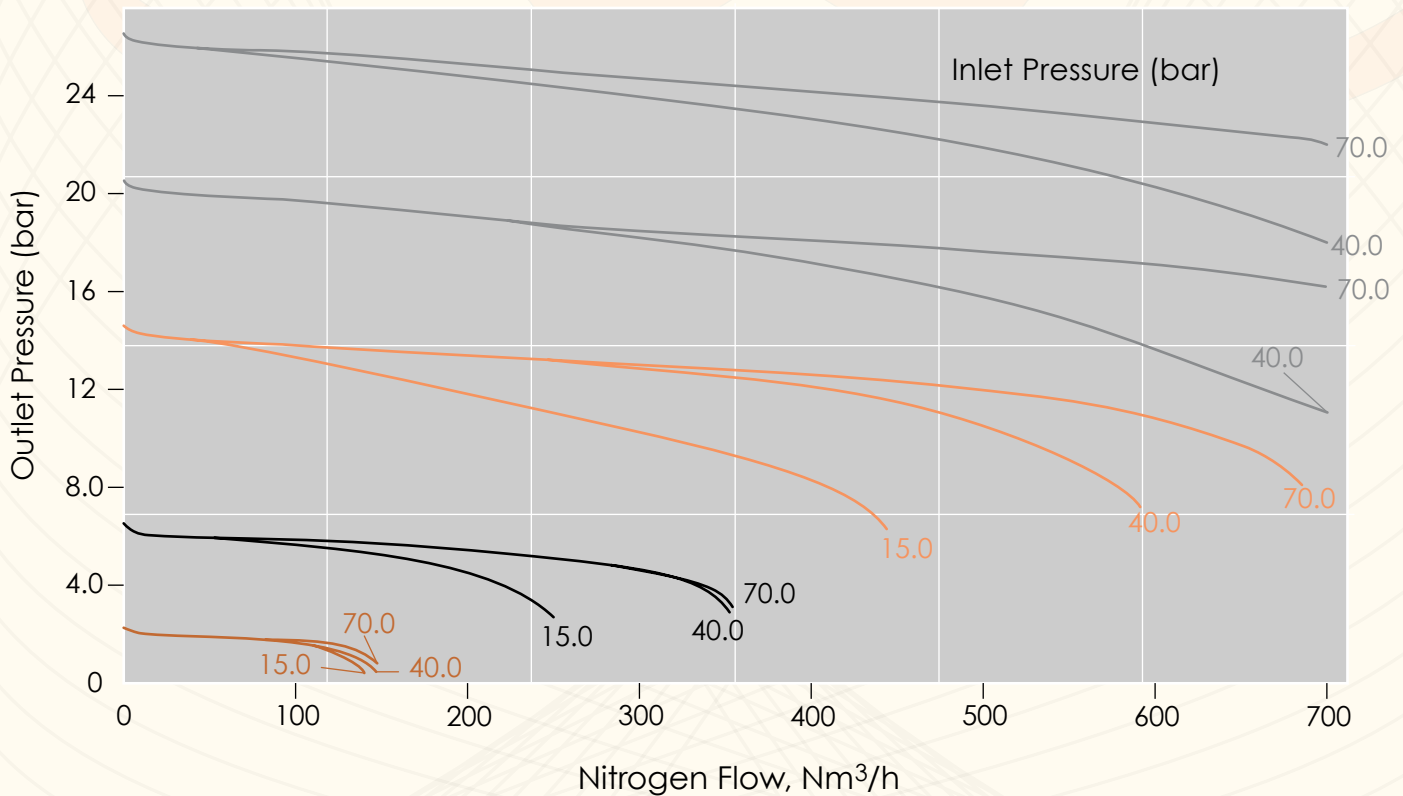

Outlet Connections Size	DIMENSIONS(mm)							
	A	B	C	D	E	F	G	H
1"	277 mm	115 mm	96 mm	62 mm	51.50 mm	45 mm	115 mm	50 mm
1 1/2 "	277 mm	115 mm	96 mm	62 mm	51.50 mm	45 mm	115 mm	50 mm

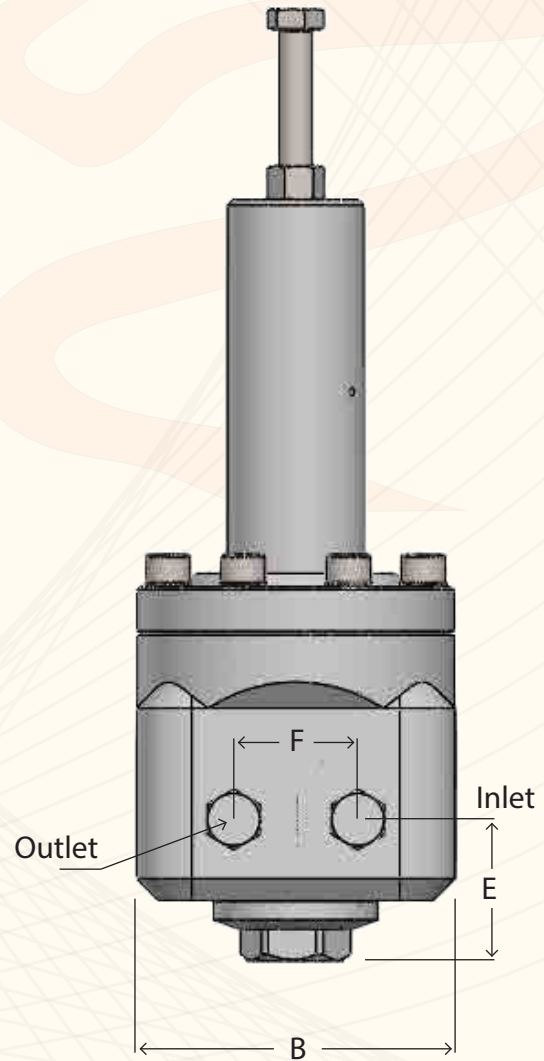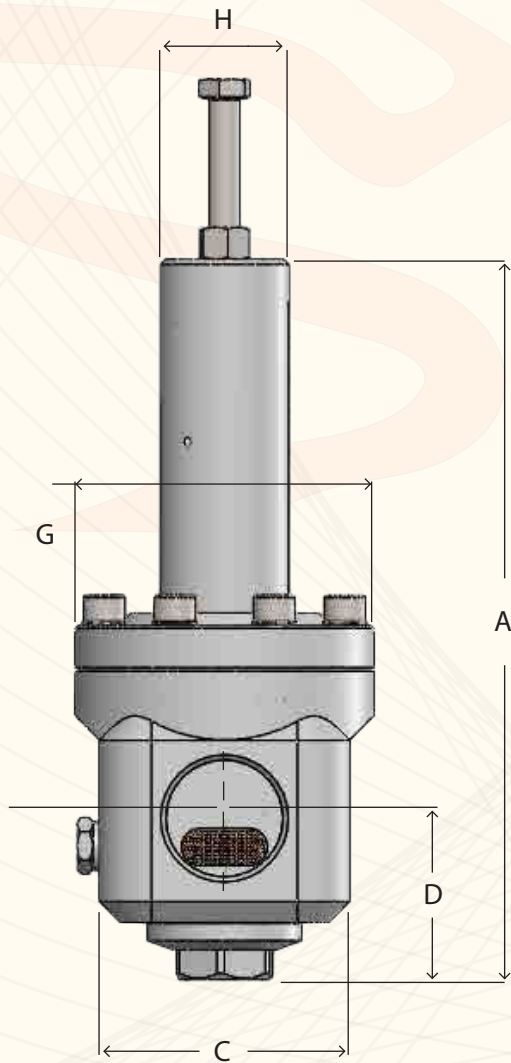

Product Code	Serial	Max Inlet Pressure	Max Outlet Pressure	Sensing Type	Temperature Rage	Seat Diameter	Flow Coefficient	Connections			
								Inlet and Outlet		Gauge	
								Size	Type		
MM.12.20.10	CNG 25	250 bar	20 bar	Diaphragm	-20° 'den+80°	19 mm	4.50	1" DN25	NPT	1/4 in NPT or ISO/BSP parallel [®] thread	
MM.12.20.20		400 bar	70 bar	Piston							
MM.12.30.10	CNG 40	250 bar	20 bar	Diaphragm			7.30	1 1/2" DN40			
MM.12.30.20		400 bar	70 bar	Piston							

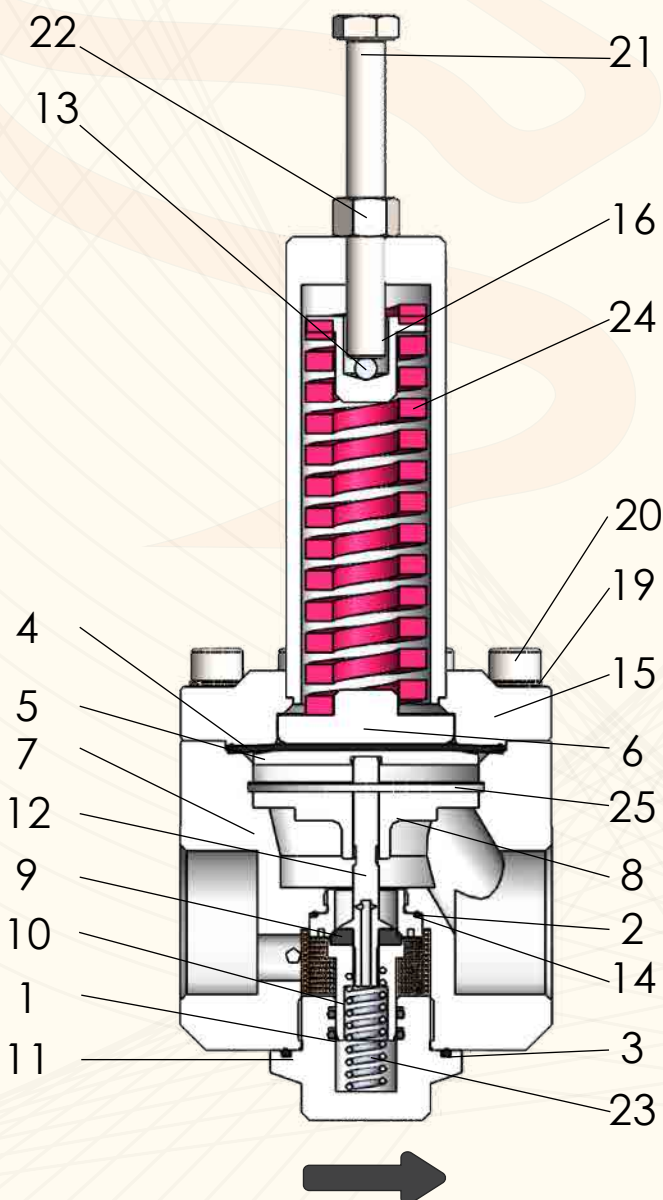

Component	
1	18,72X2,62 O-RING
2	29,87X1,78 O-RING
3	47,5X2,5 O-RING
4	DIAPHRAGM
5	DIAPHRAGM PLATE
6	BOTTOM SPRING GUIDEX
7	BODY
8	BODY PLATE
9	SEAT SEAL
10	POPPET HOUSING
11	BODY PLUG
12	POPPET
13	Ø7 BALL
14	SEAT
15	COVER
16	UPPER SPRING GUIDE
17	14X1,78 O-RING
18	NIPEL
19	DIN 7980 M10 A2
20	DIN 912 M10X30 A2
21	ISO 4017 M12X100 A2
22	ISO 4034 M12 A2
23	POPPET SPRING
24	SET SPRING
25	DIN 472 Ø70
26	FILTER


CNG 25 SERIAL

Flow Coefficient 4.50

Max Inlet Pressure 70 bar

Outlet Pressure 0-20 bar

— 0 to 40.0 bar
— 0 to 20.0 bar
— 0 to 10.0 bar
— 0 to 3.0 bar

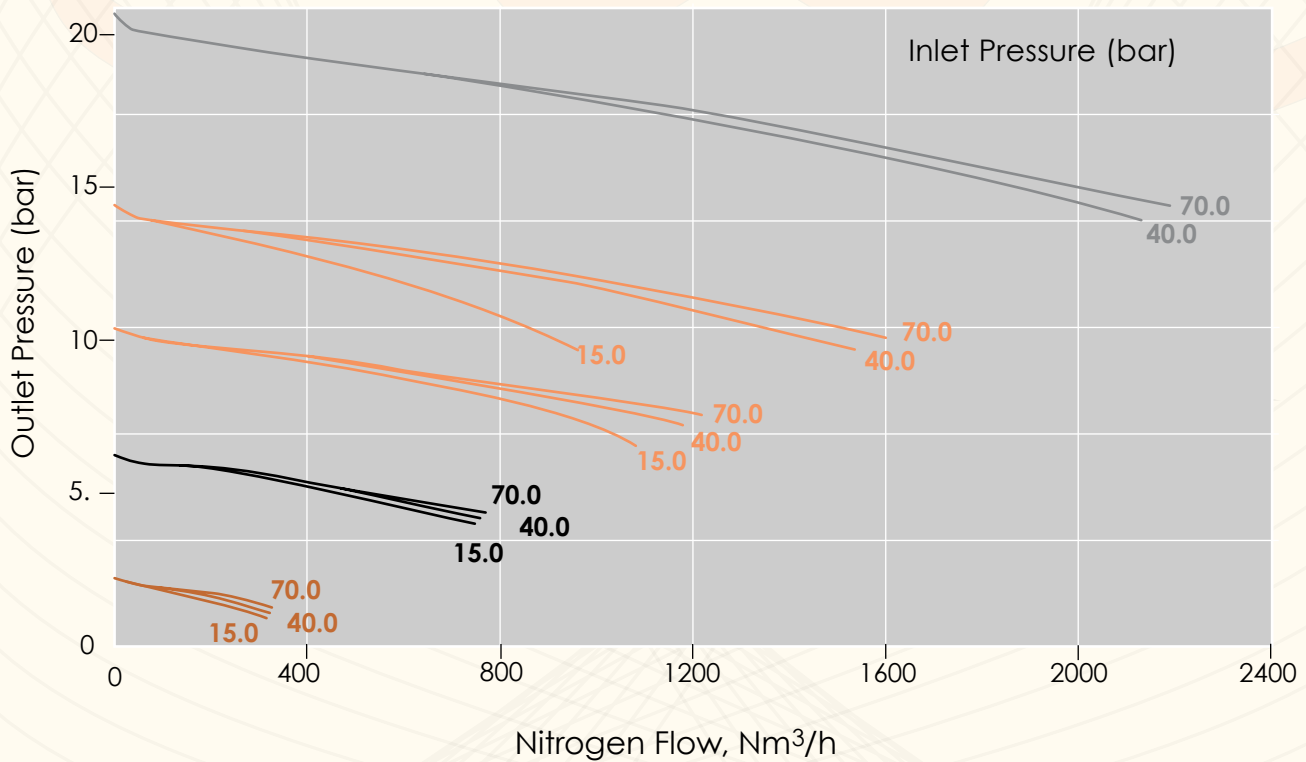


CNG 40 SERIAL

Flow Coefficient 7.30

Max Inlet Pressure 70 bar

Outlet Pressure 0-5 bar

— 0 to 5.0 bar
— 0 to 3.0 bar

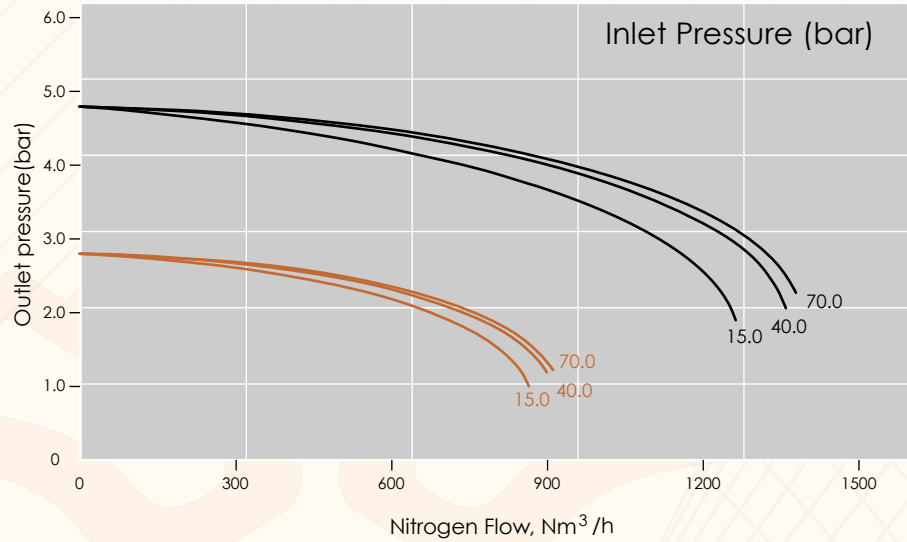


CNG 40 SERIAL


Flow Coefficient 7.30


Max Inlet Pressure 70 bar

Outlet Pressure 0-10 bar

— 0 to 3.0 bar

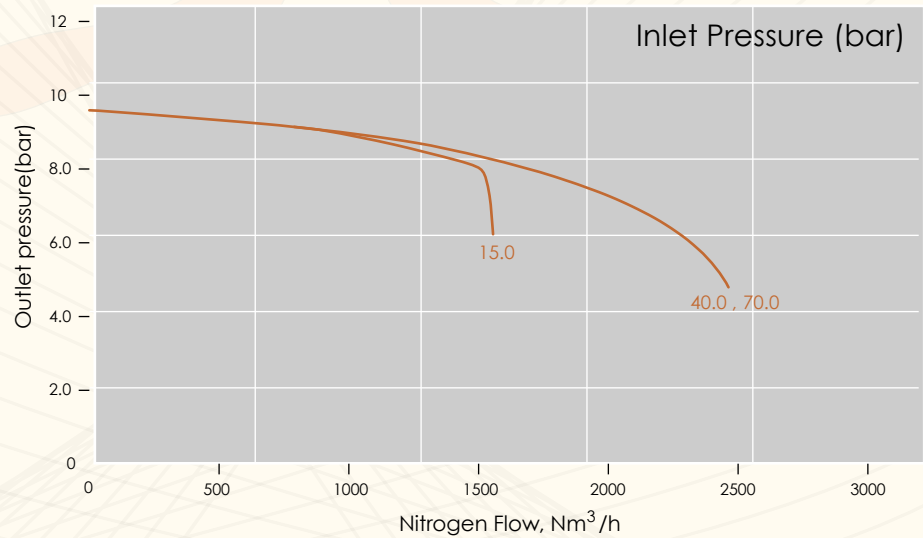

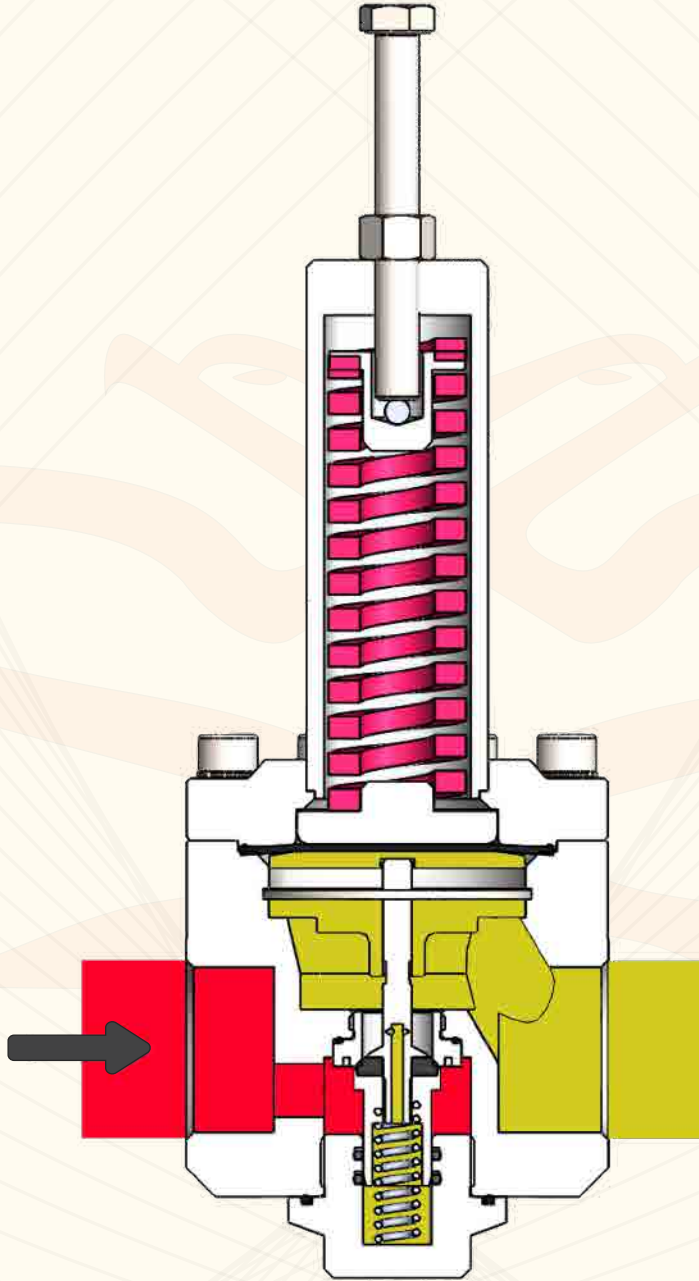

 INLET PRESSURE
 OUTLET PRESSURE